



Fairing VFM40

Fits Vision 40swb, 50, 60 and 80 series bikes.

Does NOT fit R32 or R40LWB/MWB


Congratulations on your purchase of the Vision VFM40. This fairing offers excellent weather protection and will dramatically improve the aerodynamics of your Vision. The VFM40 is designed to fit the Vision 40. 50. 60 and 80 series bikes.

Note: This unit will not fit a Vision R30 or R32.

To install the VFM40 on your Vision, please follow these directions carefully. Before you start, make sure your boom has been adjusted correctly for your leg length. If you are new to the bike, it would be a good idea to ride it for several days to make sure your boom adjustment is correct prior to installing your fairing.

Remove the black plug from the end of the front derailleur support tube. Slide the fairing mounting stem into the tube. If it does not fit, try carefully loosening the front derailleur clamp, or looking for irregularities inside the support tube. After the stem is in place, be sure to retighten the front derailleur clamp securely.

Insert the stem at least to the *minimum insertion* mark, align the stem facing directly forward and tighten the wedge bolt securely (the 6mm hex bolt accessed through the top of the stem)

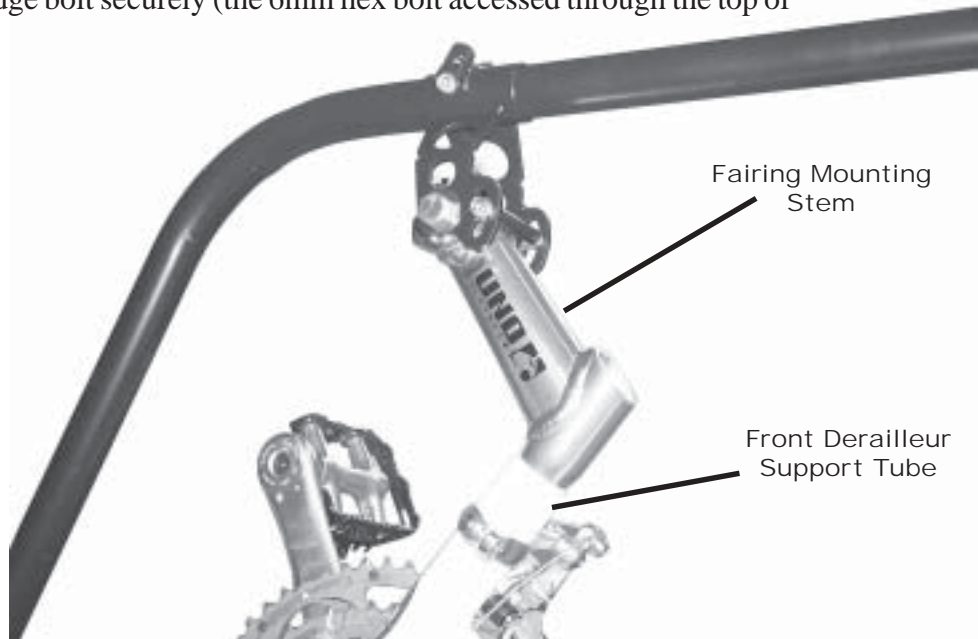

Advanced Transportation Products, Inc.
Toll Free: 877-433-4273 Fax: 425-673-4668
E-Mail: Info@visionbikes.com Web: <http://www.visionbikes.com>



Carefully remove the bubble from its box. Pull the protective paper away from the mounting holes. Unroll the bubble and lay it out on the frame. Slide a nylon washer and then a rubber washer onto a nylon screw, and insert through the bubble material. The rubber washer should be contacting the bubble. Install a rubber washer on the other side of the bubble, and thread the screw through the fairing frame. Slide another nylon washer onto the screw (outside of fairing frame) and loosely screw a nylon nut onto the end of the bolt on the inside of the frame mount. Loosely install one bolt in each of the three mounting points, spreading the fairing to fit, then install the last three bolts in the same manner. Tighten all the bolts four full turns. Do not overtighten.




Make sure the mounting stem is aligned pointing forward.

Sit on the bike and pull the faring bubble edge down. The top edge of the bubble should line up with your shirt collar. Get off the bike and set the rear travel stop against the mounting stem, limiting the rearward travel of the bubble to the appropriate point. Tighten the travel stop bolt.

Tighten the stem mounting bolt to the point where the bubble will move forward when you apply pressure to the top edge.

Loosen up the frame slider bolts, then sit on the bike. Slide the bubble and frame slider back or forth to get adequate clearance from your body or the handlebars on over-seat steering models. Flip the bubble up into the dismount position and check clearance between the pedals and the bubble. When you have the fore and aft position of the bubble correct, tighten the frame slider bolts.

Recheck all bolts and fittings before every ride.

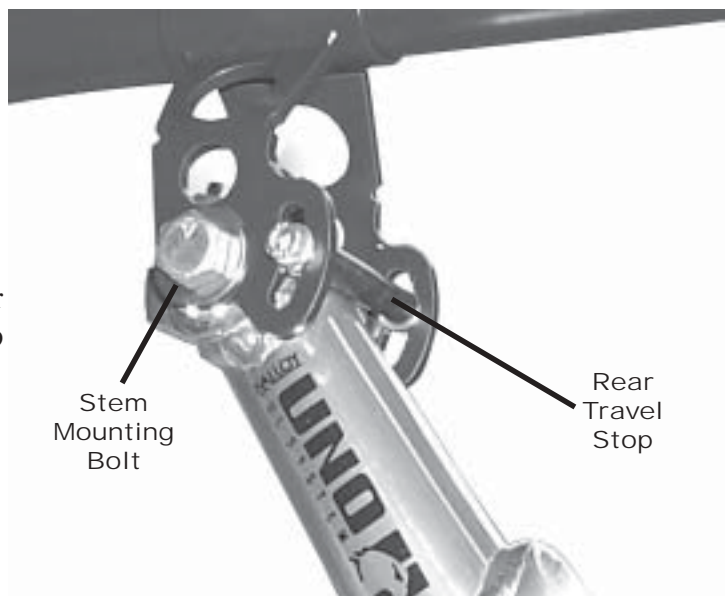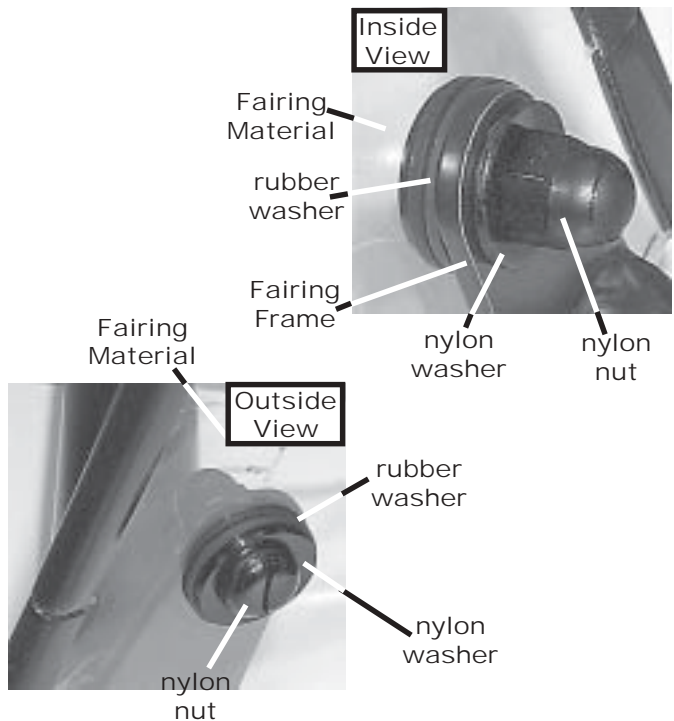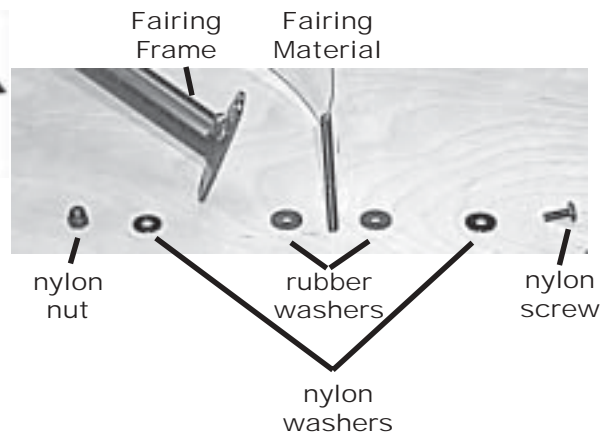



Fairing VFM40

To mount your bike with the VFM40 in place, tilt the bubble forward by grasping the top edge and applying upward pressure.

If you have over seat steering, tilt your handlebars forward as well.

Sit on the bike and pull the bubble back down against the travel stop.

The top edge of the bubble should be level with your shirt collar—you look over the fairing, not through it.

You should have enough clearance between the fairing and over seat handlebars to allow for full lock turns, as well as pedal and foot clearance. If you can not set the bubble up to get foot and handlebar clearance, do not ride the bike, see you local Vision dealer.

Warranty

Your VFM40 comes with a limited warranty. The Bubble is warranted against defects in materials or workmanship for 30 days from date of purchase. The frame is warranted for one year from date of purchase. All warranties, written or implied, are for the original purchaser only, and only cover replacement or repair of the item. This warranty only applies to the VFM40 system purchased through ATP, Inc (Vision Recumbent Bicycles).

You must call ATP, Inc. for a return authorization number, and then send the item(s) in question back to us, postage paid. Upon examination, we will repair or replace them, at our discretion.

We also offer a "no questions asked" exchange policy. If your fairing bubble or frame is damaged in any way whatsoever after the warranty period expires, we will replace it for a \$100 flat fee. All you have to do is call us for a exchange number, return the damaged item to us (postage paid) with a money order for \$100 for each fairing bubble **OR** frame exchange requested, and your receipt. We will send you a new unit. This exchange program is good for life to the original owner.

